





TECHNICAL DATA



| | |
|-----------------------|--|
| Technical Data | KÖSTER TPO SK (FR) |
| Article Number | RT 815 SK (FR) |
| Description | Fleece laminated self-adhering TPO Roofing Membrane |
| Application | Self-adhering one-layer roof waterproofing for different types of substrates |
| Installation | According to the KÖSTER TPO Installation Instructions |
| Upper side | KÖSTER TPO |
| Underside | Fleece laminated self-adhering layer |
| Reinforcing material | Glass fleece |
| Length | 20 m / roll |
| Width | 1.05 m |
| Total thickness | 1.9 mm |
| Effective thickness: | 1.5 mm |
| CE Certification | |




 Register of Companies, No. 19 187 277 - Chamber of the Laboratory North Rhine-Westphalia
 Board of Directors, Members: Dr. Christa Müller
 Phone: +49 4941 9709-0, Fax: +49 4941 9709-40, info@koster.eu, www.koster.eu


CONTACT DETAILS



KÖSTER BAUCHEMIE AG
 Dieselstraße 1-10, 26607 Aurich
 Phone: +49 4941 9709-0, Fax: +49 4941 9709-40
info@koster.eu, www.koster.eu



SELF-ADHERED KÖSTER TPO ROOFING MEMBRANES



Can be applied over EPS insulation!

SELF-ADHERED KÖSTER TPO ROOFING MEMBRANES

Fast. Safe. Easy.

These three words describe the qualities of KÖSTER TPO SK (FR) Roofing Membranes. By combining TPO Roofing Membranes with a special polyester fleece and self-adhesive technology, a fast, safe, and cost-efficient installation is ensured.

KÖSTER TPO SK (FR) is a single layer roofing system. The self-adhering layer guarantees immediate, long-term adhesion and provides maximum protection against wind suction forces. Overlaps are welded with a hot air gun making installation safe and easy. Hardly any other material is as well suited for the waterproofing of roofs as thermoplastic polyolefin (TPO).

KÖSTER TPO SK (FR) Roofing Membranes are hail resistant, UV-stable, and have a high cold flexibility down to - 50 °C. Additionally, an embedded glass fleece provides the membrane with high stability. KÖSTER TPO SK (FR) Roofing Membranes are plasticizer-free and are compatible with all insulation types.

KÖSTER TPO SK (FR) Roofing Membranes are classified as Broof (t1) and meet the requirements for "hard roofs" in accordance with DIN 4102-7. Moreover, KÖSTER TPO SK (FR) Roofing Membranes are suitable for installation directly over EPS insulation materials.


Can be applied over EPS insulation!

KÖSTER TPO SK (FR)

Stick here

Important features at a glance:

- Fast and easy installation
- Excellent adhesion to a wide range of substrates
- Cost-efficient: long life expectancy
- Maximum protection against wind suction forces
- Single-layer waterproofing
- Compatible with bitumen
- High thermal and mechanical resistance
- UV-stable
- Resistant to root and rhizome penetration
- Plasticizer-free
- Does not contaminate groundwater
- Remains flexible and elastic at low temperatures

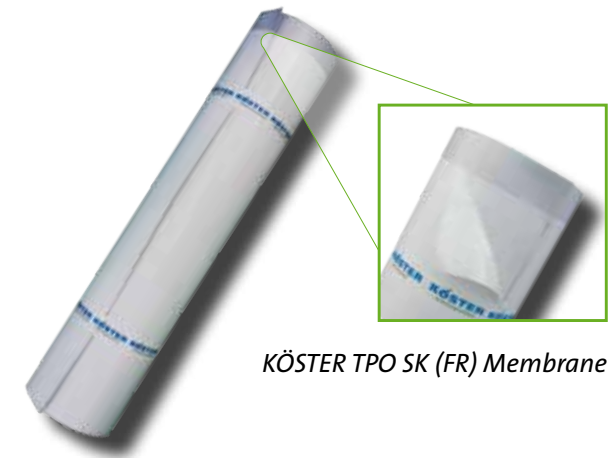

KÖSTER TPO SK (FR) Membrane