



KÖSTER Injection Gel S4

Acrylic gel for stopping active water ingress, joint, and curtain injection with adjustable reaction time

Features

KÖSTER Injection Gel S4 is used for stopping active water ingress, to quickly seal joints and for curtain injection. The setting time can be adjusted between 10 seconds and 3 minutes by changing the added amount of the B component and a change in the composition of the A2 component.

By adding an organic dispersion to the B component (KÖSTER B+), the gel can achieve a particularly high flank adhesion on mineral substrates. The organic dispersion accelerates the gel by approximately a factor of 2 and significantly improves the elongation at break.

Colored versions of the gel can be made on site by the addition of separately supplied pigments.

The standard set is supplied as follows; A1 component: 20 kg, A2 component: 1 kg, B component (salt): 0.4 kg. All components can also be ordered separately. For particularly fast blends, the A3 component can be ordered separately. To increase the flank adhesion and improve the elongation and tear resistance, the B + component (dispersion) can be ordered separately.

Colored versions of the gel can be made on site by the addition of separately supplied pigments. For curtain injections KÖSTER Injection Gel G4 is recommended. When using KÖSTER Injection Gel G4 as a curtain injection, legal codes and regulations of the respective country must be followed.

Technical Data

Dissolvability with Water
 Material viscosity S4 with B+ approx. 18 mPa·s / + 20 °C
 Material viscosity S4 with Water approx. 9 mPa·s / + 20 °C
 Working temperature > + 5 °C

Mixing ratio

Standard mixture

Component A		Component B		Reaction time in seconds at + 20 °C
A1	A2	B	Water	40 sec.
20 kg	1 kg	0.4 kg	20 kg	
A1	A2	B	B+	20 sec.
20 kg	1 kg	0.4 kg	20 kg	

Slow mixtures

Component A		Component B		Reaction time in seconds at +20 °C
A1	A2	B	Water	180 sec.
20 kg	1 kg	0.05 kg	20 kg	
A1	A2	B	B+	90 sec.
20 kg	1 kg	0.05 kg	20 kg	

Even slower mixtures are not recommended to be adjusted with the amount of salt due to the danger that the reaction does not even start


under real conditions due to impurities in the injection area. Please contact our technical consultants for reaction time over 3 minutes. In these cases use KÖSTER G4 Injection Gel.

Fast mixtures

Component A		Component B		Reaction time in seconds at +20 °C	
A1	A2	A3	B	Water	20 sec.
20 kg	0.5 kg	0.5 kg	1 kg	20 kg	
A1	A2	A3	B, B+	Wasser	10 sec.
20 kg	0.5 kg	0.5 kg	1 kg	20 kg	

Faster mixtures are not recommended to be adjusted with the amount of salt as the chain length of the polymers becomes too short. This leads to the deterioration of the final consistency of the network. Further acceleration (may become superfluous in terms of pump technology) is better achieved by temperature control - Please contact our technical consultants.


For variable adjustment, the reaction times can be approximately taken from the following diagram:

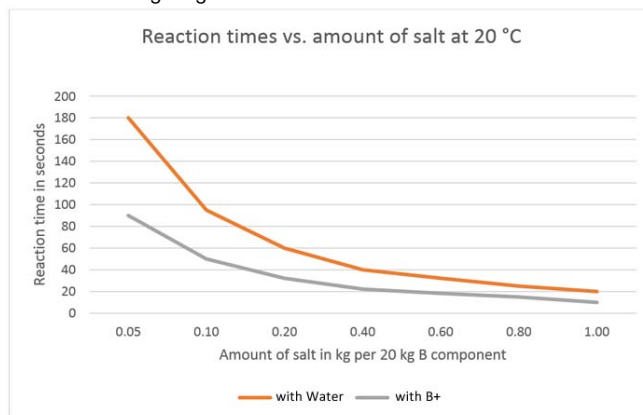

As with all reactions with injection gels, the reaction time is always

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of application have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.

dependent on the material temperature. The following diagram may be used for approximate orientation, measured for the standard mixture without KÖSTER B +:

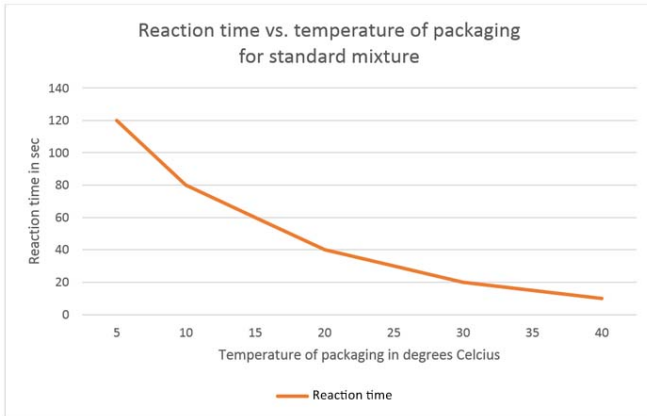

Fields of Application

Water stoppers: In the event of heavy water ingress, injection solutions can be realized if the gel times are accelerated to a high degree.

Joint injection: Using KÖSTER B+ organic dispersion improves both the flank adhesion and the elongation at break, which especially makes sense when injecting joints. The reaction times are approximately halved in contrast to the standard mixture, but can still be controlled by the amount of salt. For joint injection a longer gel time is usually recommended. Sealing joints with KÖSTER Injection Gel S4 is typically done on building components in contact with soil for repair work to stop water entering from outside. Acrylic gel joint waterproofing must always be designed in such a way that the gel seal can not dry out, e.g. by using KÖSTER FS joint Sealant or KÖSTER joint tape 20.

Curtain Injection: For the demarcation of curtain injections in the edge area, a more rapid gel time (for example into gravel) may be useful to avoid further outflow of the material. It would also be possible to adjust a lower penetration of average sands over a faster reaction time.

In other cases it is recommended to use KÖSTER Injection Gel G4 with a particularly low viscosity and a standard reaction time of 4 minutes.

Application

The processing of the material is carried out with a two-component pump with a water rinsing circuit such as the KÖSTER Acrylic Gel Pump. Prior to processing, the components are adjusted to the desired gel time as described. It should be noted that the setting of the gel requires that the injection technique can be made technically feasible correspondingly shorter gel times. Too much acceleration of the gel increases the risk that the mixing head is clogged by gel.

Mixing the components

Standard mixtures

A component (3 minutes to 40 seconds without KÖSTER B +)

The A2 component (1 kg) is completely filled in the A1 canister, closed and mixed by rocking the container on its edge for 3 minutes.



B component (40 seconds without KÖSTER B+)

For the standard mixture, which gives a gel time of 40 seconds at + 20 °C, the supplied B-component is completely filled into the empty canister and filled with 20 kg of water to a height of 21 cm (to be marked in advance). The green canister can be cleaned after use and re-used.



Fast mixtures

A components (40 seconds without KÖSTER B+)

Empty the A2 component from the canister via a drain tap into the supplied measuring cup (0.5 liter). Then repeat the procedure for the A3 component accordingly.

The mixture of A2 and A3 is filled in the A1 canister, this is then closed and mixed by rocking for 3 minutes.

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of technology have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.



Other gel times, B component

For other gel times read from the diagram, the B component (powder) with the measuring cup is taken out according to the graduation and transferred to the empty green canister. This is then filled with water to the filling height of 21 cm, sealed and mixed by rocking for 30 seconds.



All gel times with KÖSTER B+, B-component

If the organic dispersion is to be used, the measured amount of salt is transferred into the canister with the KÖSTER B+ component. The mixture is made by vigorous shaking for at least 3 minutes. Water is not added.

The mixed components can be processed for 2 hours.

Curtain injection

In the case of curtain injection, the building component to be injected is drilled in a grid of typically 40 cm square with a central hole in the center and with 10-18 mm high pressure packers are installed (such as the KÖSTER Superpacker). In the case of perforated bricks, injection lances (for example KÖSTER Distributor Lance) or KÖSTER Gel Packers are used which discharge the material to be injected on the outside of the building component in order to avoid filling the cavities. The injection is carried out in a multi-stage process with adjusted injection pressure and waiting time corresponding to the temperature between the injection stages. Please note: Too fast gel times for the KÖSTER Injection Gel S4 are not suitable for curtain injection, because sufficient distribution is not achieved. For detailed instructions please contact the KÖSTER technical support.

When used as a curtain injection, the applicable regulations for groundwater protection in the respective country must be observed. In Germany, a general building inspectorate test certificate is required for application as a curtain injection. KÖSTER Injection Gel G4 should be used here.

Joint injection


Joint injection must always be adapted to the circumstances. Standardized cases can not be described coherently due to the large number of different joint structures.

In general, the number of packers can often be kept relatively low in the area of joint injection since the grout can spread well within the joint. For overhead work on horizontal joints (eg in multi-storey car parks), it may be useful to pre-inject the joint with KÖSTER Injection Gel S4 to prevent the gel from leaking out of the joint, and then use the KÖSTER Injection Gel S4 with the B+ component added to fill the joint.

It is always the case that the holes should be positioned so that existing waterproofing is not drilled through if possible, as shown by way of example in the illustrated injection between an inner and an outer water

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of technology have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.

bar.

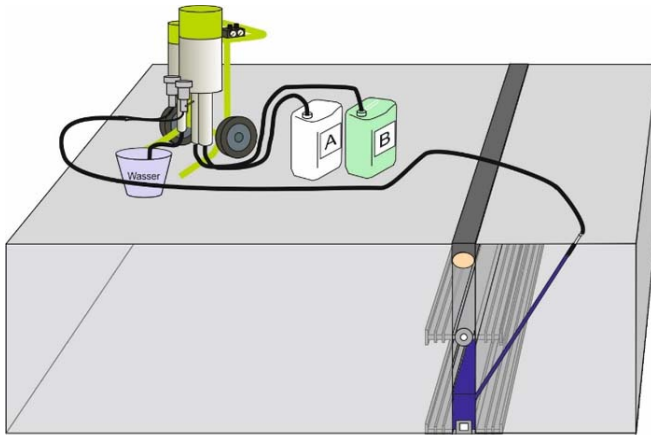

To avoid soiling of surfaces, walls and floor areas should be covered before starting work. Cured gel on floor and wall surfaces can be removed mechanically if necessary. For detailed processing instructions, please contact the KÖSTER technical department.

Consumption

Depends on the field of application

Cleaning

Clean the pump immediately after use with clean water. For this, the three intake hoses are placed in the three clean buckets supplied. The buckets are filled with clean water and pumped through the machine.

Packaging

IN 294 001 A2	1 kg
IN 294 010 A3	10 kg
IN 294 010 B	10 kg
IN 294 020 A1	20 kg
IN 294 020 B+	20 kg
IN 294 021	Component A1: 20 kg; Component A2: 1 kg; Component B: 0.4 kg
IN 294 400 B	400 g

Storage

Store cool and dry in originally sealed containers. The containers can be stored for a minimum of 6 months under proper storage conditions (dry, + 10 °C to + 25 °C). The A components should not be stored in direct sunlight.

Safety

Suitable liquid-tight protective clothing, chemical-resistant gloves and tight-fitting safety goggles or face shields must be worn during the processing of the product. During the application of the material pressure builds up. Do not stand directly behind the packers. In case of

skin contact, wash off the material immediately with lots of soap and water. In case of eye contact, flush eyes immediately and thoroughly with water or preferably an emergency eye wash bottle. Consult a doctor. Observe all governmental, state, and local safety guidelines when processing the material.

Related products

KÖSTER KB-FIX 1	Prod. code C 511 015
KÖSTER KB-FIX 5	Prod. code C 515 015
KÖSTER Injection Barrier	Prod. code IN 501 025
KÖSTER Masonry Packer 13 mm x 85 mm CH	Prod. code IN 901
KÖSTER Masonry Packer 13 mm x 115 mm CH	Prod. code IN 902
KÖSTER Superpacker 10 mm x 85 mm CH	Prod. code IN 912 001
KÖSTER Superpacker 10 mm x 115 mm CH	Prod. code IN 913 001
KÖSTER Superpacker 13 mm x 85 mm CH	Prod. code IN 914 001
KÖSTER Superpacker 13 mm x 115 mm CH	Prod. code IN 915 001
KÖSTER Superpacker 13 mm x 85 mm PH	Prod. code IN 916 001
KÖSTER Superpacker 13 mm x 115 mm PH	Prod. code IN 917 001
KÖSTER Distributor Lance	Prod. code IN 926 001
KÖSTER Injection Gun	Prod. code IN 929 016
KÖSTER Acrylic Gel Pump	Prod. code IN 930 001
KÖSTER Gel Packer (Base)	Prod. code IN 931 001
KÖSTER Gel Packer (End piece)	Prod. code IN 932 001
KÖSTER Gel Packer extension pipe 800 mm	Prod. code IN 933 001
KÖSTER Grip Head	Prod. code IN 953 005
KÖSTER Joint Sealant FS-V black	Prod. code J 231
KÖSTER Joint Sealant FS-H black	Prod. code J 232
KÖSTER Joint Sealant FS-V grey	Prod. code J 233
KÖSTER Joint Sealant FS-H grey	Prod. code J 234
KÖSTER Joint Tape 20	Prod. code J 820 020
KÖSTER Joint Tape 30	Prod. code J 830 020
KÖSTER KD 2 Blitz Powder	Prod. code W 512
KÖSTER Repair Mortar	Prod. code W 530 025
KÖSTER Waterstop	Prod. code W 540 015
KÖSTER Rubber Gloves	Prod. code X 920 001

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of technology have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.